



Series H

C 300 H

C 300 H x4 

C 350 H

C 350 H x4 

Series HI

C 300 HI

C 300 HI x4 

C 350 HI

C 350 HI x4 



FullGrip® System exclusivo AUSA:
Tracción integral por discos múltiples conectable electro-hidráulicamente desde el mando joystick.

FullGrip® System:
On demand 4WD connectable by means multiple discs with electro-hydraulic engagement from the joystick.

FullGrip® System de AUSA:
4 RM sur demande au moyen de disques multiples avec connexion électro-hydraulique depuis le joystick.

FullGrip® System:
Elektrohydraulisch, zuschaltbarer Allradantrieb – am Joystick zu betätigen.



www.ausa.com

AUSA Center, S.L. • Ctra. de Vic, Km 2.8 - P.O.B. 194. 08243 Manresa - BARCELONA (ESPAÑA) Tel.: +34 93 874 73 11 - E-mail: ausa@ausa.com

ISO 9001

ISO 14001



AUSA Madrid • Pol. Ind. Coslada - C. Marconi 15-17. 28823 Coslada - MADRID (ESPAÑA) Tel.: +34 91 669 00 06 - E-mail: ausa.madrid@ausa.com

AUSA France • Z. I. Saint Charles - Rue de Zürich, 66000 PERPIGNAN (FRANCE) Tel.: +33 (0) 4 68 54 38 97 - E-mail: ausa.france@ausa.com

AUSA Deutschland • Heinrich - Welken Str. 5. 59069 HAMM (GERMANY) Tel.: +49 (0) 2385-9359362 - E-mail: ausa.deutschland@ausa.com

BEIJING Rep. Office • Address Room 527. HengXiang Building, Tuanjiehu Nanli, Chaoyang District. - BEIJING 100026 (CHINA)

Tel.: 86-10-8597 1983 - Fax: 86-10-8597 1993 - E-mail: ausa.china@ausa.com

AUSA UK • Tel.: 07970639988 - E-mail: ausa.uk@ausa.com

AUSA Brasil • Tel.: +55 51 33622111 - E-mail: ausa.brasil@ausa.com

AUSA México • Calzada Vallejo, 725. 07750 Del. Gustavo A. Madero, México D.F. (MÉXICO) Tel.: +55 2166-9066 - E-mail: ausa.mexico@ausa.com

(Sede central AUSA-Manresa)



FEM-AEM




C 300 H/HI _3000Kg
C 350 H/HI _3500Kg



www.ausa.com

DIMENSIONS (mm)	C 300 H	C 300 HI	C 300 Hx4 C 300 Hlx4	C 350 H	C 350 HI	C 350 H x4 C 350 Hlx4
A	2200	2200	2200	2240	2240	2240
B	250	250	220	250	250	220
C	325	325	325	380	380	380
D	1460	1460	1460	1460	1460	1460
(narrow axle) E	1540	1540	1540 (H/HI)	1770	1770	1770 (H/HI)
(wide axle) E	1870	-	1870 (H)	1910	-	1910 (H)
F	3500	3500	4280	3500	3500	4280
G	2850	2850	3005	2850	2850	3005
I	120	120	120	120	120	120
J	50	50	50	50	50	50
K	750	750	750	750	750	750
L	4500	4500	4500	4500	4500	4500
M	600	600	600	600	600	600
N	1950	1950	1950	1950	1950	1950
O	1200	1200	1200	1200	1200	1200
P	5600	5600	6805	5600	5600	6805

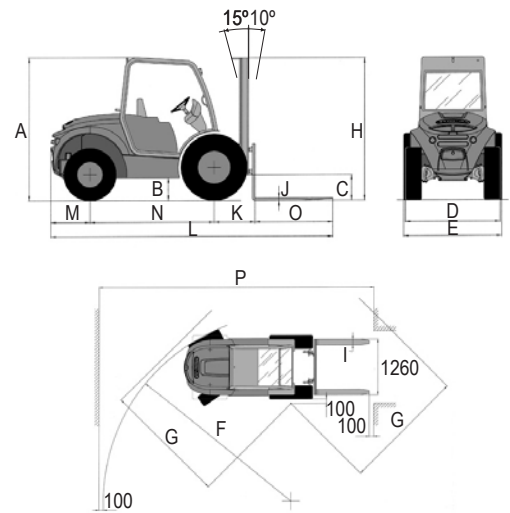

Type of mast	Maximum lifting height (mm)	Free lift (mm)	H Machine height with mast retracted (mm)				Machine height with mast extended (mm)		Load (Kg) at max. height according stability test standard (A/B)*					
			C 300 H/HI	C 350 H/HI	C 300 Hx4 C 300 Hlx4	C 350 Hx4 C 350 Hlx4	C 300 H/HI C 300 Hx4/HI	C 350 H/HI Hx4	(A) C 300 H/Hx4 (narrow axle)	(B) C 300 HI/Hlx4 (narrow axle)	(A) C 300 H/Hx4 (wide axle)	(A) C350H / Hx4 (narrow axle)	(A) C350H / Hx4 (wide axle)	(B) C 350 HI/Hlx4 (narrow axle)
Duplex (Std.)	3300	120	2600	2670	2600	2670	4500	4500	3000	3000	3000	3500	3500	3500
Duplex	4000	120	2950	2990	2950	2990	5200	5200	2250	2550	3000	3000	3500	3000
Triplex (free lift)	3700	1200	2090	2130	2090	2130	4900	4900	2400	2700	3000	3200	3500	3200
Triplex (free lift)	5400	1680	2660	2700	2660	2700	6600	6600	-	1300	1500	-	1600	1500
Triplex (free lift)	6780	2280	-	3220	-	3220	-	7820	-	1000	-	-	600	1200

TECHNICAL SPECIFICATIONS

Load capacity (Kg) @ centre of gravity		3000 a 500mm / 2800 a 600mm		3500 a 500mm / 3250 a 600mm	
Lifting height (Standard duplex mast) (mm)		3300			
Engine	Diesel	KUBOTA V 2403 - M		KUBOTA V 3600	
	Power acc./SAE J 1995 (KW/HP)	36.5 / 50		48.6 / 66	
	N° of cylinders	4			
	Cooling system	Water			
Traction		4x2	4x4 FullGrip®	4x2	4x4 FullGrip®
Transmission		Hydrostatic with variable flow pump and automatic regulation. Electric gear inverter in joystick. Inching pedal.			
Unladen weight (Kg) (with full tanks)		4700	4900	5000	5200
Gradeability		35%		32%	
Speed (Maximum) (Km/h)		20			
Engine starting system		Electric			
Tyres	Front	12.5 / 80-18	12.5 / 80-18	16.5 / 70-20	16.5 / 70-20
	Rear	27x10-12 (C300H/HI/Hlx4)	10.0 / 75-15.3 (C300Hx4)	27x10-12 (C350H/HI/Hlx4)	10.0 / 75-15.3 (C350Hx4)
Steering		Hydraulic. Working pressure 140 bar.			
External turning radius (mm)		3500	4280	3500	4280
Tank capacity (l)	Fuel	80			
	Hydraulic fluid	85			
Service brake		Oil-immersed, multidisc			
Parking brake		Oil-immersed, multidisc			
Hydraulic circuit		18-8 cc. double gear pump. Working pressure 170 bar.		Bom18-8 cc. double gear pump. Working pressure 190 bar.	
Operating pressures for accessories (bar)		170		190	
Forkcarriage		FEM 3 - Wide: 1200mm (optional:1660mm)			
Stability test standard	(A)*	For rough terrain use EN1726 - 1 - AP.H (Models H)			
	(B)*	For semi-industrial use EN 1726 - 1 ISO 1074 (Models HI)			

STANDARD EQUIPMENT

Open and tilting cabin
 Joystick with integrated functions, "total control of movements"
 Ergonomic and comfort seat with height, weight and distance adjustable with seat belt
 Audible reverse warning
 Rear view mirrors
 Rotating beacon
 3rd auxiliary hydraulic service
 Side-shift

OPTIONAL EQUIPMENT

Semi - closed cabin
 Closed cabin with heater
 Radio/stereo CD
 Electronic anti-theft protection system
 Homologated lighting equipment
 Air Conditioning
 Working lights
 4th auxiliary hydraulic service
 5 th auxiliary hydraulic service
 Catalytic converter
 Spark arrestor
 Load backrest
 Limited slip differential in front axle
 Enhanced heater for Nordic countries
 600, 800 and 1000 litre hydraulic buckets
 Many other attachments fitted with manufacturer warranty